

M40 连接器 CONNECTOR

M40 圆形连接器
Round plug connector

现场接线
Field-wireable

3+PE+2-pole

3+PE+4-pole

插孔 Female
直线 Straight



插孔 Female
直线 Straight



1	型号 Form	No.	940661	940681															
	极数 Suppression		6p(4 × Ø3.6+2 × Ø2)	8p(4 × Ø3.6+4 × Ø2)															
	尺寸图 Description																		
	压线范围 Wire diameter		13-28mm																
	针脚排序 Contact layout																		
2	技术参数 Technical data																		
	额定电压 Supply voltage	630 V (AC/DC) / 250 V (AC/DC)																	
	额定电流 Current per contact	75A / 30A																	
	防护等级 Protection	IP67- 插孔插针配合拧紧 When plugged and screwed down																	
	温度范围 Temperature range	-20...+130°C																	
	测试电压 (两插针之间) Test voltage	4000V / 2500V																	
	外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating																	
	绝缘内嵌体材料 Insulation embedded body material	PA66/PBT, UL 94/V0																	
	接触件 (插孔) Contact element (female)		<table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">插孔 Female Ø2mm</td> <td>1.00-2.50mm²</td> <td>926201</td> </tr> <tr> <td>2.50-4.00mm²</td> <td>926221</td> </tr> <tr> <td rowspan="3">插孔 Female Ø3.6mm</td> <td>1.50-4.00mm²</td> <td>936241</td> </tr> <tr> <td>6.00mm²</td> <td>936261</td> </tr> <tr> <td>10.00mm²</td> <td>936281</td> </tr> </tbody> </table>	类型 Type	压线范围 Wire diameter	订货号 Part No.	插孔 Female Ø2mm	1.00-2.50mm ²	926201	2.50-4.00mm ²	926221	插孔 Female Ø3.6mm	1.50-4.00mm ²	936241	6.00mm ²	936261	10.00mm ²	936281	
类型 Type	压线范围 Wire diameter	订货号 Part No.																	
插孔 Female Ø2mm	1.00-2.50mm ²	926201																	
	2.50-4.00mm ²	926221																	
插孔 Female Ø3.6mm	1.50-4.00mm ²	936241																	
	6.00mm ²	936261																	
	10.00mm ²	936281																	
	订货号 Part No.																		
	可参考: 1.1.0 Reference: 1.1.0																		
	1 型号 Form																		
	备注 Notes	配件及技术参数页面 Accessories and technical page: 6.6.4																	

M40 动力连接器

M40 连接器 CONNECTOR








M40 圆形连接器
Round plug connector M40
现场接线
Field-wireable
3+PE+2-pole

插针 Male 0°
法兰安装 Flange installation



插针 Male 90°
法兰安装 Flange installation

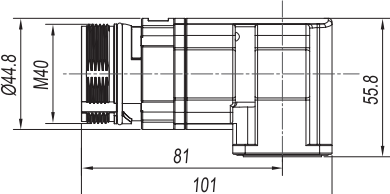

1	型号 Form	No.	940631	940651															
	极数 Suppression		6p(4 × Ø3.6+2 × Ø2)	6p(4 × Ø3.6+2 × Ø2)															
	尺寸图 Description																		
	开孔尺寸																		
	针脚排序 Contact layout																		
2	技术参数 Technical data																		
	额定电压 Supply voltage	630 V (AC/DC) / 250 V (AC/DC)																	
	额定电流 Current per contact	60A / 30A																	
	防护等级 Protection	IP67– 插孔插针配合拧紧 When plugged and screwed down																	
	温度范围 Temperature range	-20...+130°C																	
	测试电压 (两插针之间) Test voltage	4000V / 2500V																	
	外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating																	
	绝缘内嵌体材料 Insulation embedded body material	PA66/PBT, UL 94/V0																	
	接触件 (插针) Contact element (male)	 Ø2mm  Ø3.6mm	<table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">插针 Male Ø2mm</td> <td>1.00–2.50mm²</td> <td>926101</td> </tr> <tr> <td>2.50–4.00mm²</td> <td>926121</td> </tr> <tr> <td rowspan="3">插针 Male Ø3.6mm</td> <td>1.50–4.00mm²</td> <td>936141</td> </tr> <tr> <td>6.00mm²</td> <td>936161</td> </tr> <tr> <td>10.00mm²</td> <td>936181</td> </tr> </tbody> </table>	类型 Type	压线范围 Wire diameter	订货号 Part No.	插针 Male Ø2mm	1.00–2.50mm ²	926101	2.50–4.00mm ²	926121	插针 Male Ø3.6mm	1.50–4.00mm ²	936141	6.00mm ²	936161	10.00mm ²	936181	
类型 Type	压线范围 Wire diameter	订货号 Part No.																	
插针 Male Ø2mm	1.00–2.50mm ²	926101																	
	2.50–4.00mm ²	926121																	
插针 Male Ø3.6mm	1.50–4.00mm ²	936141																	
	6.00mm ²	936161																	
	10.00mm ²	936181																	
	订货号 Part No.																		
	可参考: 1.1.0 Reference: 1.1.0																		
		1	型号 Form																
	备注 Notes	配件及技术参数页面 Accessories and technical page: 6.6.4																	

M40 动力连接器

M40 连接器 CONNECTOR

M40 圆形连接器
Round plug connector M40
现场接线
Field-wireable
3+PE+4-pole

插针 Male 0°
法兰安装 Flange installation





插针 Male 90°
法兰安装 Flange installation





1 型号 Form No. 940851 940871

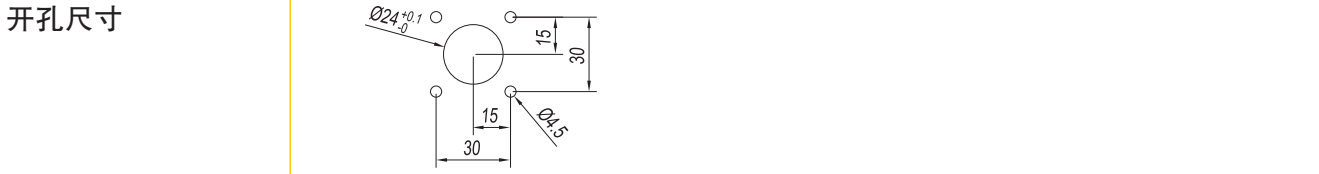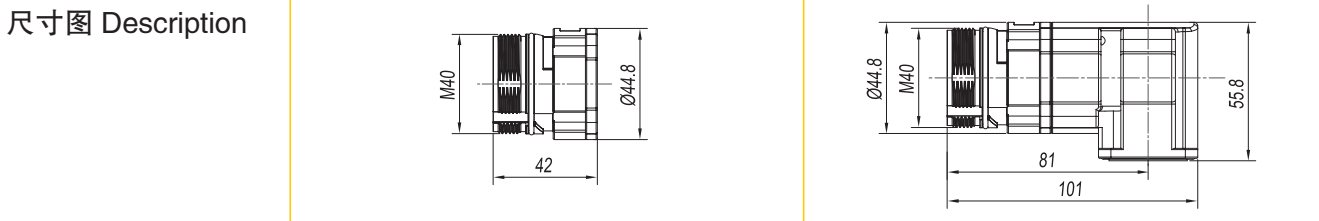极数 Suppression 8p(4 × Ø3.6+4 × Ø2) 8p(4 × Ø3.6+4 × Ø2)



2 技术参数 Technical data

额定电压 Supply voltage	630 V (AC/DC) / 250 V (AC/DC)
额定电流 Current per contact	60A / 30A
防护等级 Protection	IP67- 插孔插针配合拧紧 When plugged and screwed down
温度范围 Temperature range	-20...+130°C
测试电压 (两插针之间) Test voltage	4000V / 2500V
外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating
绝缘内嵌体材料 Insulation embedded body material	PA66/PBT, UL 94/V0

接触件 (插针) Contact element (male)	类型 Type	压线范围 Wire diameter	订货号 Part No.
 Ø2mm	插针 Male Ø2mm	1.00–2.50mm ²	926101
		2.50–4.00mm ²	926121
 Ø3.6mm	插针 Male Ø3.6mm	1.50–4.00mm ²	936141
		6.00mm ²	936161
		10.00mm ²	936181

订货号 Part No.

可参考: 1.1.0
Reference: 1.1.0

1 型号 Form

备注 Notes

配件及技术参数页面 Accessories and technical page: 6.6.4

M40 动力连接器

M40 圆形电源连接器 CONNECTOR



M40 圆形连接器
Round plug connector M40
现场接线
Field-wireable
3+PE+2-pole
3+PE+4-pole

插针 Male
延长式 Extended type connector



1	型号 Form	No.	940611	940811															
	极数 Suppression		6p(4 × Ø3.6+2 × Ø2)	8p(4 × Ø3.6+4 × Ø2)															
	尺寸图 Description																		
	压线范围 Wire diameter		13-28mm																
	针脚排序 Contact layout																		
2	技术参数 Technical data																		
	额定电压 Supply voltage	630 V (AC/DC) / 250 V (AC/DC)																	
	额定电流 Current per contact	75A / 30A																	
	防护等级 Protection	IP67– 插孔插针配合拧紧 When plugged and screwed down																	
	温度范围 Temperature range	-20...+130°C																	
	测试电压 (两插针之间) Test voltage	4000V / 2500V																	
	外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating																	
	绝缘内嵌体材料 Insulation embedded body material	PA66/PBT, UL 94/V0																	
	接触件 (插针) Contact element (male)	Ø2mm Ø3.6mm	<table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">插针 Male Ø2mm</td> <td>1.00–2.50mm²</td> <td>926101</td> </tr> <tr> <td>2.50–4.00mm²</td> <td>926121</td> </tr> <tr> <td rowspan="3">插针 Male Ø3.6mm</td> <td>1.50–4.00mm²</td> <td>936141</td> </tr> <tr> <td>6.00mm²</td> <td>936161</td> </tr> <tr> <td>10.00mm²</td> <td>936181</td> </tr> </tbody> </table>	类型 Type	压线范围 Wire diameter	订货号 Part No.	插针 Male Ø2mm	1.00–2.50mm ²	926101	2.50–4.00mm ²	926121	插针 Male Ø3.6mm	1.50–4.00mm ²	936141	6.00mm ²	936161	10.00mm ²	936181	
类型 Type	压线范围 Wire diameter	订货号 Part No.																	
插针 Male Ø2mm	1.00–2.50mm ²	926101																	
	2.50–4.00mm ²	926121																	
插针 Male Ø3.6mm	1.50–4.00mm ²	936141																	
	6.00mm ²	936161																	
	10.00mm ²	936181																	
	订货号 Part No.																		
	可参考: 1.1.0 Reference: 1.1.0																		
	1 型号 Form																		
	备注 Notes																		
		配件及技术参数页面 Accessories and technical page: 6.6.4																	