





# M23 连接器 CONNECTOR

现场接线  
Field-wireable  
6-pole  
3+PE+4-pole  
3+PE+5-pole

插孔 Female  
直出线 straight



<b>1</b>	<b>型号 Form</b>	<b>No.</b>	<b>923401</b>	<b>923601</b>	<b>923801</b>	<b>923901</b>											
	<b>极数</b> Suppression		4p(4xØ2)	6p(6xØ2)	8p(4xØ2+4xØ1)	9p(4xØ2+5xØ1)											
	<b>尺寸图 Description</b>																
	<b>压线范围 Wire diameter</b>	7-17mm															
	<b>针脚排序</b> Contact layout																
<b>2</b>	<b>技术参数 Technical data</b>	<b>6p(6xØ2)</b>	<b>8p(4xØ2+4xØ1)</b>														
	额定电压 Supply voltage	630 V AC/DC	630 V (AC/DC) / 250 V (AC/DC)														
	额定电流 Current per contact	30A	30A / 10A														
	防护等级 Protection	IP67- 插孔插针配合拧紧 When plugged and screwd down															
	温度范围 Temperature range	-20...+130°C															
	测试电压 (两插针之间) Test voltage	6000V	6000V / 2500V														
	外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating															
	绝缘内嵌材料 Insulation embedded body material	PA66/PBT, UL 94/V0															
	<b>接触件 (插孔)</b> Contact element (female)		<table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td>插孔 Female Ø1mm</td> <td>0.25~1.00mm<sup>2</sup></td> <td>916431</td> </tr> <tr> <td rowspan="2">插孔 Female Ø2mm</td> <td>1.00~2.50mm<sup>2</sup></td> <td>926201</td> </tr> <tr> <td>2.50~4.00mm<sup>2</sup></td> <td>926221</td> </tr> </tbody> </table>	类型 Type	压线范围 Wire diameter	订货号 Part No.	插孔 Female Ø1mm	0.25~1.00mm <sup>2</sup>	916431	插孔 Female Ø2mm	1.00~2.50mm <sup>2</sup>	926201	2.50~4.00mm <sup>2</sup>	926221			
类型 Type	压线范围 Wire diameter	订货号 Part No.															
插孔 Female Ø1mm	0.25~1.00mm <sup>2</sup>	916431															
插孔 Female Ø2mm	1.00~2.50mm <sup>2</sup>	926201															
	2.50~4.00mm <sup>2</sup>	926221															
	<b>订货号 Part No.</b>																
	可参考: 1.1.0 Reference: 1.1.0																
	<b>1</b>	<b>型号 Form</b>															
	<b>备注 Notes</b>	配件及技术参数页面 Accessories and technical page: 6.6.4															

# M23 连接器 CONNECTOR

M23 圆形连接器  
Round plug connector

现场接线  
Field-wireable

6-pole  
3+PE+4-pole  
3+PE+5-pole

插针 Male 0°  
法兰安装 Flange installation



插针 Male 90°  
法兰安装 Flange installation



M23 动力连接器

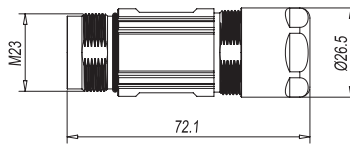





1	型号 Form	No.	923621	923821	923921	923641	923841	923941												
	极数 Suppression		6p(6xØ2)	8p(4xØ2+4xØ1)	9p(4xØ2+5xØ1)	6p(6xØ2)	8p(4xØ2+4xØ1)	9p(4xØ2+5xØ1)												
	尺寸图 Description																			
	开孔尺寸																			
	针脚排序 Contact layout																			
2	技术参数 Technical data		6p(6xØ2)		8p(4xØ2+4xØ1)		9p(4xØ2+5xØ1)													
	额定电压 Supply voltage		630 V AC/DC		630 V (AC/DC) / 250 V (AC/DC)		630 V (AC/DC) / 250 V (AC/DC)													
	额定电流 Current per contact		30A		30A / 10A		30A / 10A													
	防护等级 Protection		IP67- 插孔插针配合拧紧 When plugged and screwed down																	
	温度范围 Temperature range		-20...+130°C																	
	测试电压 (两插针之间) Test voltage		6000V		6000V / 2500V		6000V / 2500V													
	外壳材料 Housing material		锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating																	
	绝缘内嵌体材料 Insulation embedded body material		PA66/PBT, UL 94/V0																	
	接触件 (插针) Contact element (male)		<table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td>插针 Male Ø1mm</td> <td>0.25~1.00mm<sup>2</sup></td> <td>916331</td> </tr> <tr> <td rowspan="2">插针 Male Ø2mm</td> <td>1.00~2.50mm<sup>2</sup></td> <td>926101</td> </tr> <tr> <td>2.50~4.00mm<sup>2</sup></td> <td>926121</td> </tr> </tbody> </table>							类型 Type	压线范围 Wire diameter	订货号 Part No.	插针 Male Ø1mm	0.25~1.00mm <sup>2</sup>	916331	插针 Male Ø2mm	1.00~2.50mm <sup>2</sup>	926101	2.50~4.00mm <sup>2</sup>	926121
类型 Type	压线范围 Wire diameter	订货号 Part No.																		
插针 Male Ø1mm	0.25~1.00mm <sup>2</sup>	916331																		
插针 Male Ø2mm	1.00~2.50mm <sup>2</sup>	926101																		
	2.50~4.00mm <sup>2</sup>	926121																		
	订货号 Part No.																			
	可参考: 1.1.0 Reference: 1.1.0		-----																	
	1 型号 Form																			
	备注 Notes		配件及技术参数页面 Accessories and technical page: 6.6.4																	

# M23 连接器 CONNECTOR

现场接线  
Field-wireable  
6-pole  
3+PE+4-pole  
3+PE+5-pole

插针 延长式连接器 Male Extended type connector



1	型号 Form No.	923661	923881	923991																											
	极数 Suppression	6p(6xØ2)	8p(4xØ2+4xØ1)	9p(4xØ2+5xØ1)																											
	尺寸图 Description																														
	压线范围 Wire diameter	7-17mm																													
2	针脚排序 Contact layout																														
	技术参数 Technical data	<table border="1"> <tr> <td>额定电压 Supply voltage</td> <td colspan="3">630 V (AC/DC) / 250 V (AC/DC)</td> </tr> <tr> <td>额定电流 Current per contact</td> <td colspan="3">30A / 10A</td> </tr> <tr> <td>防护等级 Protection</td> <td colspan="3">IP67- 插孔插针配合拧紧 When plugged and screwed down</td> </tr> <tr> <td>温度范围 Temperature range</td> <td colspan="3">-20...+130°C</td> </tr> <tr> <td>测试电压 (两插针之间) Test voltage</td> <td colspan="3">2500V</td> </tr> <tr> <td>外壳材料 Housing material</td> <td colspan="3">锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating</td> </tr> <tr> <td>绝缘内嵌体材料 Insulation embedded body material</td> <td colspan="3">PA66/PBT, UL 94/V0</td> </tr> </table>			额定电压 Supply voltage	630 V (AC/DC) / 250 V (AC/DC)			额定电流 Current per contact	30A / 10A			防护等级 Protection	IP67- 插孔插针配合拧紧 When plugged and screwed down			温度范围 Temperature range	-20...+130°C			测试电压 (两插针之间) Test voltage	2500V			外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating			绝缘内嵌体材料 Insulation embedded body material	PA66/PBT, UL 94/V0	
额定电压 Supply voltage	630 V (AC/DC) / 250 V (AC/DC)																														
额定电流 Current per contact	30A / 10A																														
防护等级 Protection	IP67- 插孔插针配合拧紧 When plugged and screwed down																														
温度范围 Temperature range	-20...+130°C																														
测试电压 (两插针之间) Test voltage	2500V																														
外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating																														
绝缘内嵌体材料 Insulation embedded body material	PA66/PBT, UL 94/V0																														
	接触件 (插针) Contact element (male)	 Ø1mm   Ø2mm	<table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td>插针 Male Ø1mm</td> <td>0.25~1.00mm<sup>2</sup></td> <td>916331</td> </tr> <tr> <td rowspan="2">插针 Male Ø2mm</td> <td>1.00~2.50mm<sup>2</sup></td> <td>926101</td> </tr> <tr> <td>2.50~4.00mm<sup>2</sup></td> <td>926121</td> </tr> </tbody> </table>	类型 Type	压线范围 Wire diameter	订货号 Part No.	插针 Male Ø1mm	0.25~1.00mm <sup>2</sup>	916331	插针 Male Ø2mm	1.00~2.50mm <sup>2</sup>	926101	2.50~4.00mm <sup>2</sup>	926121																	
类型 Type	压线范围 Wire diameter	订货号 Part No.																													
插针 Male Ø1mm	0.25~1.00mm <sup>2</sup>	916331																													
插针 Male Ø2mm	1.00~2.50mm <sup>2</sup>	926101																													
	2.50~4.00mm <sup>2</sup>	926121																													
	订货号 Part No.	<table border="1"> <tr> <td>_____</td> <td>_____</td> <td>_____</td> <td>_____</td> </tr> </table>			_____	_____	_____	_____																							
_____	_____	_____	_____																												
	可参考: 1.1.0 Reference: 1.1.0	<table border="1"> <tr> <td>_____</td> <td>_____</td> <td>_____</td> <td>_____</td> </tr> </table>			_____	_____	_____	_____																							
_____	_____	_____	_____																												
	1 型号 Form																														
	备注 Notes	配件及技术参数页面 Accessories and technical page: 6.6.4																													

M23 动力连接器