


# 电缆旋紧件及各类电缆附件 CABLE FITTINGS AND ACCESSORIES

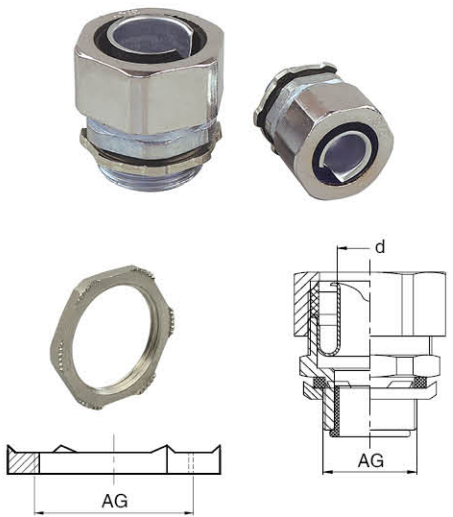

名称 Identification	尺寸 (AG) Designation	卡口范围 (Φ) Clamp range (mm)	公称内径 (d) Metric	型号 Type	订货号 Part No.
锁紧式电缆接头 Locking type cable connector 	PG9	4-8	Ø8	JSC-9-MS	62509101
	PG11	5-10	Ø10	JSC-11-MS	62511101
	PG13.5	6-12	Ø12.5	JSC-13-MS	62513101
	PG16	8-14	Ø15.5	JSC-16-MS	62516101
	PG21	13-18	Ø20	JSC-21-MS	62521101
	PG29	18-25	Ø25	JSC-29-MS	62529101
	PG36	22-32	Ø32	JSC-36-MS	62536101
	PG42	30-38	Ø38	JSC-42-MS	62542101
	M12×1.5	2-6	Ø6	JSC-12-M	62512102
	M16×1.5	4-8	Ø8	JSC-16-M	62516102
	M20×1.5	6-12	Ø12.5	JSC-20-M	62520102
	M25×1.5	10-16	Ø15.5	JSC-25-M	62525102
	M32×1.5	15-22	Ø20	JSC-32-M	62532102
	M40×1.5	21-30	Ø32	JSC-40-M	62540102
	M50×1.5	30-38	Ø38	JSC-50-M	62550102

防护等级 Protection degree: IP65  
 材料 Material: 外黄铜镀镍, 内芯套为橡胶 Nickel plated brass PA6  
 密封件 Seal material: PA/NBR  
 工作温度 Temperature range: -40°C to +100°C  
 特征: 外接金属软管, 内部夹紧电缆, 防止电缆松动

名称 Identification	螺丝规格 (AG) Designation	适配软管尺寸 Suitable conduits size		型号 Type	订货号 Part No.
		英制 Inches	公称内径 (d) Metric		
金属软管接头 Metal flexible tube fittings 	PG7	G3/16	Ø6	JRC-7-MS	61607101
	PG9	G1/4	Ø8	JRC-9-MST	61609111
	PG9	G5/16	Ø10	JRC-9-MS	61609101
	PG11	G3/8	Ø12.5	JRC-11-MS	61611101
	PG13.5	G3/8	Ø12.5	JRC-13-MST	61613111
	PG13.5	G1/2	Ø15.5	JRC-13-MS	61613101
	PG16	G1/2	Ø15.5	JRC-16-MS	61616101
	PG21	G3/4	Ø20	JRC-21-MS	61621101
	PG29	G1	Ø25	JRC-29-MST	61629111
	PG29	G1 1/4	Ø32	JRC-29-MS	61629101
	PG36	G1 1/2	Ø38	JRC-36-MS	61636101
	PG42	G1 1/2	Ø38	JRC-42-MS	61642101
	PG48	G2	Ø51	JRC-48-MS	61648101
	M12×1.5	G3/16	Ø6	JRC-12-M	61612102
	M16×1.5	G1/4	Ø8	JRC-16-MT	61616112
	M16×1.5	G5/16	Ø10	JRC-16-M	61616102
	M20×1.5	G3/8	Ø12	JRC-20-MT	61620112
	M20×1.5	G1/2	Ø15	JRC-20-M	61620102
	M25×1.5	G3/4	Ø20	JRC-25-M	61625102
	M32×1.5	G1	Ø25	JRC-32-M	61632102
M40×1.5	G1 1/4	Ø32	JRC-40-M	61640102	
M50×1.5	G1 1/2	Ø38	JRC-50-M	61650102	
M63×1.5	G2	Ø51	JRC-63-M	61663102	

防护等级 Protection degree: IP65  
 材料 Material: 锌合金 Zinc alloy  
 密封件 Seal material: 尼龙 PA  
 工作温度 Temperature range: -40°C to +100°C