

M23 连接器 ROUND PLUG CONNECTOR

现场接线
Field-wireable

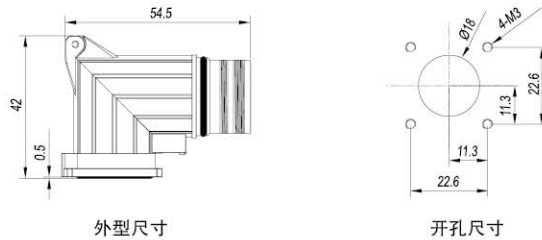
M23 圆形连接器 Round plug connector (9,12)-pole
插针 Male 90° 法兰安装 Flange installation




M23 信号连接器

1 型号 Form No.	923491	923495	923492	923497	923421	923422
极数 Suppression	9xØ1mm 9-pole	8x1mm+1x2mm 9-pole	9xØ1mm 9-pole	8x1mm+1x2mm 9-pole	12xØ1mm 12-pole	12xØ1mm 12-pole

尺寸图 Description



针脚排序
Contact layout

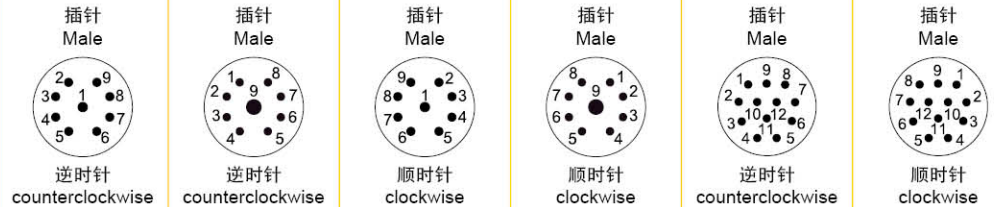

2 技术参数 Technical data

额定电压 Supply voltage	160 V AC/DC
额定电流 Current per contact	10A
防护等级 Protection	IP67- 插孔插针配合拧紧 When plugged and screwed down
温度范围 Temperature range	-20...+130°C
测试电压 (两插针之间) Test voltage	2500V
外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating
绝缘内嵌体材料 Insulation embedded body material	PA66/PBT, UL 94/V0

接触件 (插针)
Contact element (male)



类型 Type	压线范围 Wire diameter	订货号 Part No.
插针 Male Ø1mm	0.03-0.34mm ²	916101
	0.14-1.00mm ²	916121
插针 Male Ø2mm	0.50-1.50mm ²	916131
	0.50-1.50mm ²	956121

订货号 Part No.

可参考: 1.0.1
Reference: 1.0.1

1 型号 Form

备注 Notes

配件及技术参数页面 Accessories and technical page: 6.6.5








M23 连接器 ROUND PLUG CONNECTOR

现场接线
Field-wireable

M23 圆形连接器 Round plug connector (17,16+3)-pole
插针 Male 90° 法兰安装 Flange installation



M23 信号连接器

1	型号 Form	No.	923471	923472	923493	923494															
	极数 Suppression		17xØ1mm 17-pole	17xØ1mm 17-pole	16xØ1mm+3xØ1.5mm 19-pole	16xØ1mm+3xØ1.5mm 19-pole															
	尺寸图 Description		 <p>外型尺寸</p>		 <p>开孔尺寸</p>																
	针脚排序 Contact layout		 <p>插针 Male 逆时针 counterclockwise</p>	 <p>插针 Male 顺时针 clockwise</p>	 <p>插针 Male 逆时针 counterclockwise</p>	 <p>插针 Male 顺时针 clockwise</p>															
2	技术参数 Technical data		160 V AC/DC			125 V AC/DC															
	额定电压 Supply voltage		160 V AC/DC			125 V AC/DC															
	额定电流 Current per contact		10A																		
	防护等级 Protection		IP67- 插孔插针配合拧紧 When plugged and screwed down																		
	温度范围 Temperature range		-20...+130°C																		
	测试电压 (两插针之间) Test voltage		2500V																		
	外壳材料 Housing material		锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating																		
	绝缘内嵌体材料 Insulation embedded body material		PA66/PBT, UL 94/V0																		
	接触件 (插针) Contact element (male)		 <p>Ø1mm</p>	<table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td rowspan="3">插针 Male Ø1mm</td> <td>0.03-0.34mm²</td> <td>916101</td> </tr> <tr> <td>0.14-1.00mm²</td> <td>916121</td> </tr> <tr> <td>0.50-1.50mm²</td> <td>916131</td> </tr> <tr> <td rowspan="2">插针 Male Ø1.5mm</td> <td>0.24-1.00mm²</td> <td>936101</td> </tr> <tr> <td>0.50-1.50mm²</td> <td>936121</td> </tr> </tbody> </table>	类型 Type	压线范围 Wire diameter	订货号 Part No.	插针 Male Ø1mm	0.03-0.34mm ²	916101	0.14-1.00mm ²	916121	0.50-1.50mm ²	916131	插针 Male Ø1.5mm	0.24-1.00mm ²	936101	0.50-1.50mm ²	936121		
类型 Type	压线范围 Wire diameter	订货号 Part No.																			
插针 Male Ø1mm	0.03-0.34mm ²	916101																			
	0.14-1.00mm ²	916121																			
	0.50-1.50mm ²	916131																			
插针 Male Ø1.5mm	0.24-1.00mm ²	936101																			
	0.50-1.50mm ²	936121																			
	订货号 Part No.																				
	可参考: 1.0.1 Reference: 1.0.1																				
	1 型号 Form																				
	备注 Notes																				
			配件及技术参数页面 Accessories and technical page: 6.6.5																		