

D-SUB 9 Pin 总线连接器

屏蔽 Shielded
螺钉压接
With screw terminals

插针 Male
45°




插孔 Female
45°



1 型号 Form	955091	955092
极数 Suppression	9-pole	9-pole
电路图 Circuit diagram	<p>插针 Male 9 Pin</p>	<p>插孔 Female 9 Pin</p>
压线范围 Wire diameter	4...10mm	

2 技术参数 Technical data		
额定电压 Supply voltage	50V AC/DC	
额定电流 Current per contact (40°C)	1A	
温度范围 Temperature range	-20...+75 °C	
压线方式 Wiring method	螺钉压接 With screw terminals	

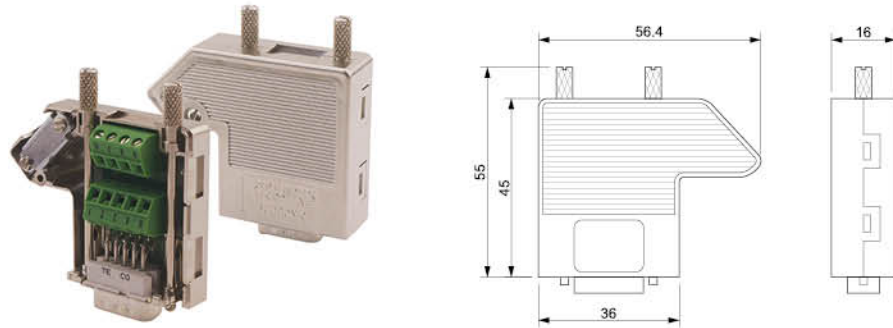

订货号 Part No.

可参考: 1.0.1
Reference: 1.0.1

1 型号 Form

备注 Notes