

M40 圆形电源连接器 ROUND THE POWER CONNECTOR

M40 圆形连接器
Round plug connector M40

插针 Male
延长式 Extended type connector


现场接线
Field-wireable
3+PE+2-pole
3+PE+4-pole



1 型号 Form No. 940611 940811


极数 Suppression 6p(4 × Ø3.6+2 × Ø2) 8p(4 × Ø3.6+4 × Ø2)

尺寸图 Description

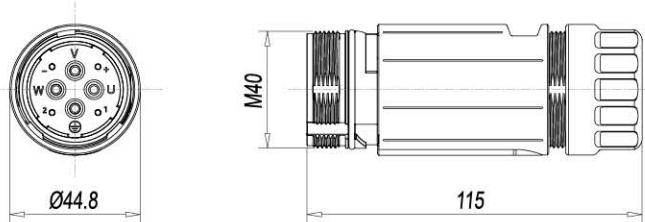

压线范围 Wire diameter 13-28mm

针脚排序
Contact layout



2 技术参数 Technical data

额定电压 Supply voltage	630 V (AC/DC) / 250 V (AC/DC)
额定电流 Current per contact	75A / 30A
防护等级 Protection	IP67- 插孔插针配合拧紧 When plugged and screw down
温度范围 Temperature range	-20...+130°C
测试电压 (两插针之间) Test voltage	4000V / 2500V
外壳材料 Housing material	锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating
绝缘内嵌材料 Insulation embedded body material	PA66/PBT, UL 94/V0

接触件 (插针)
Contact element (male)



类型 Type	压线范围 Wire diameter	订货号 Part No.
插针 Male Ø2mm	1.00-2.50mm ²	926101
	2.50-4.00mm ²	926121
插针 Male Ø3.6mm	1.50-4.00mm ²	936141
	6.00mm ²	936161
	10.00mm ²	936181

订货号 Part No.

可参考: 1.0.1
Reference: 1.0.1

1 型号 Form

备注 Notes

配件及技术参数页面 Accessories and technical page: 6.6.5