

穿墙板系统 Cable entry plate KDP/N 24/X




优点 Benefits

- 节约空间 Extremely low space requirement
- 防护等级 Protection class IP65
- 内置密封结构 Built-in sealing structure
- 一穿式使用方式 Assembly without tools
- 带有线缆标识的可能性
Cable & plug manufacturer's system guarantee remains valid

材料 Material

材质 Properties: 改进型尼龙 (不含卤素)
halogen-free, silicone-free
温度范围 Temperature range: -30°C to +70°C
防护等级 Protection degree: IP65
阻燃性能 Flame class (UL94): V0
颜色 Color: 黑色 black

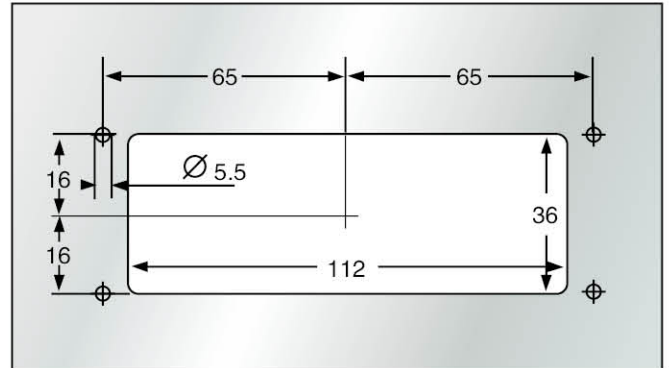

技术参数 Technical data

- 切割面 Cut-out dimensions 112 × 36mm
- KDP 外部尺寸 External dimensions: L=147mm × B=59mm × 15 mm
- 抗拉性能符合 Strain relief according DIN/EN 50262/98
- 抗弱酸弱碱

型号 Type	订货号 Part No.	夹线范围 Clamping range (mm)									穿线数量 Openings quantity
		1.5-2.6	2.5-5.0	3.0-6.5	4.1-8.1	5.0-9.2	8.0-12.5	9.0-14.0	9.6-15.9	14.0-20.0	
KDP/N 24/11	97301110	---	---	4	---	4	---	---	---	3	11
KDP/N 24/12	97301120	---	---	---	---	---	12	---	---	---	12
KDP/N 24/13	97301130	---	---	2	6	---	---	4	---	1	13
KDP/N 24/14	97301140	---	---	6	---	4	---	---	4	---	14
KDP/N 24/17	97301150	---	---	---	---	17	---	---	---	---	17
KDP/N 24/17-1	97301151	---	---	11	1	---	5	---	---	---	17
KDP/N 24/22-1	97301160	---	---	16	---	4	2	---	---	---	22
KDP/N 24/22	97301161	---	---	15	---	6	---	---	---	1	22
KDP/N 24/23	97301170	---	---	---	23	---	---	---	---	---	23
KDP/N 24/29	97301180	---	---	29	---	---	---	---	---	---	29
KDP/N 24/29-1	97301181	---	---	26	---	3	---	---	---	---	29
KDP/N 24/80	97301190	78	2	---	---	---	---	---	---	---	80
BP/N 24	97171624	---	---	---	---	---	---	---	---	---	0